





# ACHS250 Series

## 250W / Half Brick

### AC/DC

#### Applications

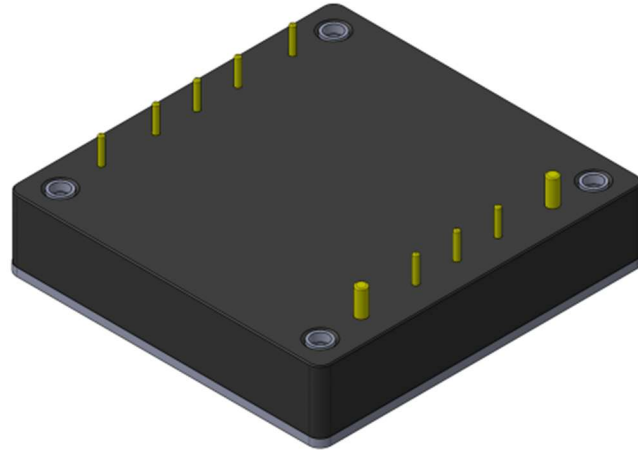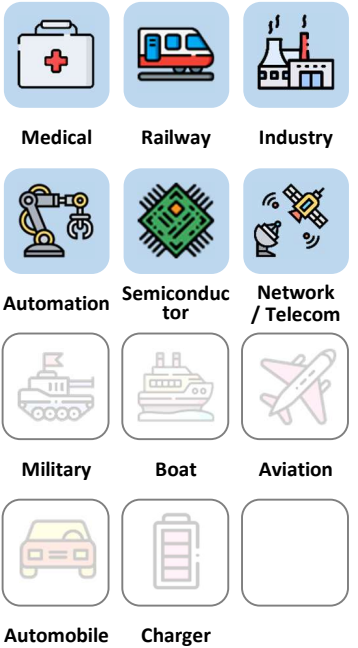

**3** Years Warranty



#### Features

1/2 Brick	90~264VAC Input range	250W Active PFC	Long Hold-up Time	-40~100°C Case Temperature	±5% Output Trimming	3000 VAC Insulation	91 % High efficiency
Base plate cooled	ON / OFF REMOTE	OCP	OVP	OTP	SCP	Operate 50/60/400HZ	

#### Model Number Structure

AC H S 250 - 120 S - 250

Series Name	Package	Watt	Output Voltage (VDC)	Output Quantity	Actual Watt
AC series	Half Brick	250	120 : 12	S : Single	Actual Watt
			240 : 24		
			280 : 28		
			360 : 36		
			480 : 48		


## Model Selection Guide

Typical @ Ta=+25 °C under nominal line voltage conditions unless noted

Model	Input			Output			Efficiency
	Voltage (V)		Current (A)	Voltage	Current	Power	
	Range	Nominal	Full load	(V)	(A)	(W)	Typ.(%)
ACHS250-120S-250	90-264	230	1.21	12	20.80	250	90
ACHS250-240S-250	90-264	230	1.19	24	10.4	250	91
ACHS250-280S-250	90-264	230	1.19	28	8.93	250	91
ACHS250-360S-250	90-264	230	1.21	36	6.94	250	90
ACHS250-480S-250	90-264	230	1.21	48	5.20	250	90

## Description

**AC series - Half Brick 250 converter** is a 250W isolated, regulated ac/dc converter with active PFC in half brick package and long hold-up time setting by external capacitors. It features a high efficiency up to 91%, wide working case temperature range -40~+100°C, no minimum load required, 3kVac reinforced insulation, OVP, OCP, SCP, OTP, etc. These power modules use advanced power processing, control and packaging technologies and are suitable for many applications with harsh environments where wide temperature variation and space limitations, etc.

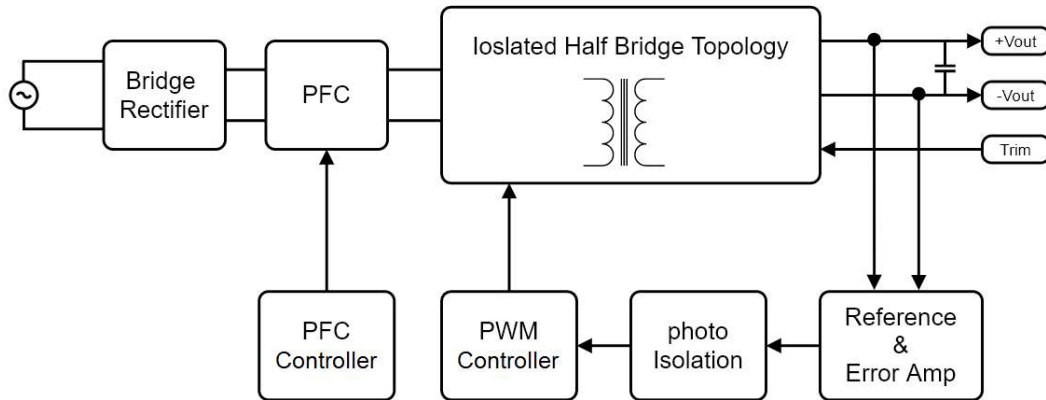

ACHS250 Series Block Diagram

## Electrical Specifications

(Typical @ Ta=+25 °C under nominal line voltage conditions unless noted.)

### Input Specifications

Parameter	Notes and Conditions	Min.	Typ.	Max.	Unit
Operating Input Voltage Ranges		90	230	264	VAC
Operating Input Frequency Ranges <sup>1</sup>		47	50/60	63	Hz
Operating Input Frequency Ranges <sup>2</sup>			400		Hz
Input Current	at 115VAC 100% load at 230VAC 100% load		2.6 1.3		A
Inrush Current	cold start at 230Vac, 25°C	Limited by external components (Thermistor)			
Power Factor <sup>1</sup>	at 115VAC 100% load at 230VAC 100% load		0.99 0.97		
Power Factor <sup>2</sup>	at 115VAC (400Hz) 100% load at 230VAC (400Hz) 100% load		0.99 0.94		
Leakage Current	at 240VAC 60Hz 100% load			0.75	mA

### Output Specifications

Parameter	Notes and Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	100% Load			±1.5	%
Line Regulation	High Line to Low Line			±0.5	%
Load Regulation	0% to 100% Load			±1	%
Output Ripple & Noise Voltage	Bandwidth 20MHz and with 10uF+0.1uF MLCC, Output Capacitor by recommended component			2	%V <sub>pk-pk</sub>
Output Voltage Adjustment Range	adjustable by external resistor			±5	%
Minimum Load		0			A
Hold Up Time	at full load & 115 VAC	Setting by external capacitors between +BC & -BC			
Over Voltage Protection		120		140	%
Over Current Protection	Hiccup mode	120		160	%
Short-circuit Protection	Hiccup mode	Auto-Recovery			



**General Specifications & Environmental Specifications**

Parameter	Notes and Conditions	Min.	Typ.	Max.	Unit
Switching Frequency	PFC/AC-DC		133/120		kHz
Storage Temperature Range	All models	-55		125	°C
Over Temperature Protection	Auto Recovery		100		°C
Operating Case Temperature	on aluminum base plate	-40		90	°C
Humidity (non condensing)	All models			95	%
Isolation Voltage	Input to Output		3000		VAC
	Input to Base		1500		VAC
	Output to Base		500		VAC
Calculated MTBF	BellCore-TR-332@ 50°C G.B	1.1			M HR
Weight		120 (4.23)			g (oz.)
Dimensions		2.40" x 2.30" x 0.52" (60.9 x 58.4 x 13.1mm)			
Case Material	Aluminum base with plastic case				

It is recommended to protect the input by fuses or other protection devices. **Modules could meet EN55032 Class A and Class B standard with external components.** The information and specifications contained in this data sheet are believed to be correct at time of publication. All specifications are subject to change without notice. No rights under any patent accompany the sale of any such products or information contained herein.

## Mechanical Dimensions & Pin Assignments

### Shape

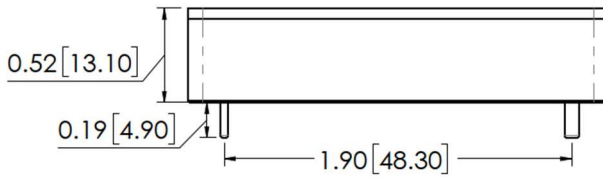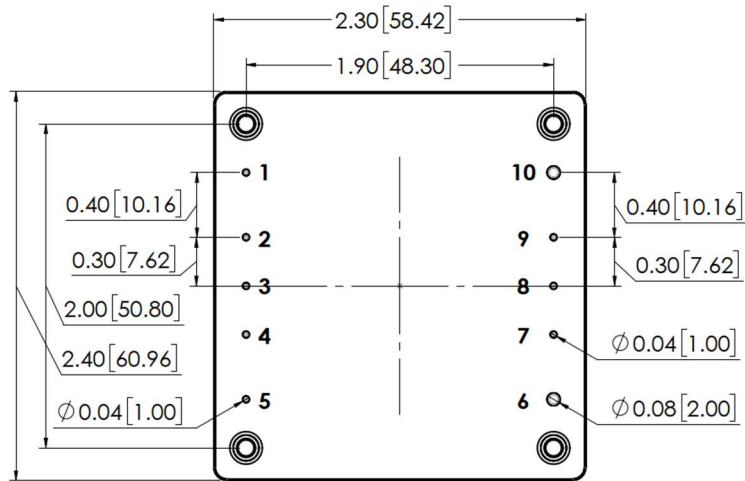

#### Note:

**Pin Material:** Copper Alloy

**Pin Plating:** Gold

**Dimensions in inches [mm]**

**Tolerances:** .XX±0.02 [ .X±0.5mm]

#### Pin Assignments:

Pin#		Description
1	BC-	Connect to external capacitor
2	BC+	
3	EN	Remote control
4	AC1	AC input
5	AC2	
6	+Vo	Vout+
7	+S	Vsense+
8	Trim	Trim
9	-S	Vsense-
10	-Vo	Vout-
Other	Base	Aluminum base can be connected to FG

**Trimming Output Voltage – for Single output models**

Only the single output converters have a trim function. That allows users to adjust the output voltage from +5% to -5%, please refer to the trim table that follow for details. Adjustments to the output voltage can be used with a simple fixed resistor as shown in Figures 1 and 2. A single fixed resistor can increase or decrease the output voltage depending on its connection.

**Note:**

- ※ Trim adjustments higher than the specified range can have an adverse effect on the converter’s performance and are not recommended.
- ※ If the trim function is not used, leave the trim pin open.

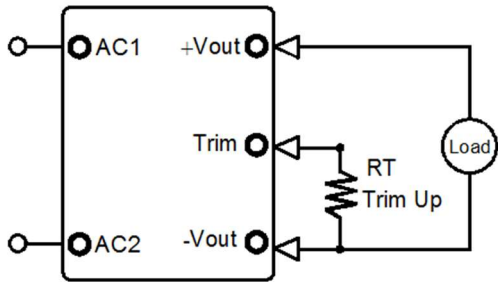


Figure 1. Trim Connections To increase Output Voltages Using Fixed Resistors

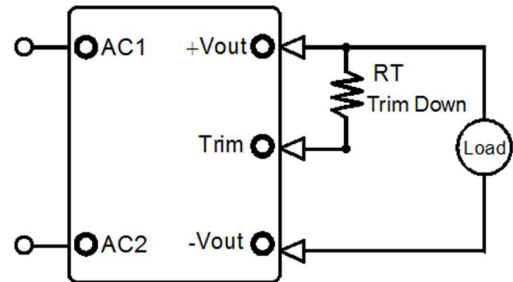


Figure 2. Trim Connections To decrease Output Voltages Using Fixed Resistors

Vout	Trim up resistor value(KΩ)				
	1%	2%	3%	4%	5%
12	202.33	77.67	36.11	15.33	2.87
24	239.8	94.4	45.9	21.6	7.1
28	741.0	295.5	147.0	72.8	28.2
36	574.7	226.9	110.9	52.9	18.1
48	1384.2	526.1	240.1	97.0	11.2

Vout	Trim down resistor value(KΩ)				
	-1%	-2%	-3%	-4%	-5%
12	891.7	416.3	257.9	178.7	131.1
24	2430.0	1175.4	757.3	548.2	422.7
28	8859.0	4304.5	2786.3	2027.2	1571.8
36	9083.3	4431.1	2880.4	2105.1	1639.9
48	30621.8	14979.9	9765.9	7159.0	5594.8

**Output Ripple Noise**

The two copper strips simulate real-world PCB impedances between the converter and its load. Scope measurements should be made using BNC connectors or the probe ground should be less than 1/2 inch and soldered directly to the fixture. All external capacitors should have appropriate voltage ratings and be located as close to the converter as possible. Temperature variations for all relevant parameters should be taken into consideration. The most effective combination of external I/O capacitors will be a function of line voltage and source impedance, as well as particular load and layout conditions. See Figure 3.


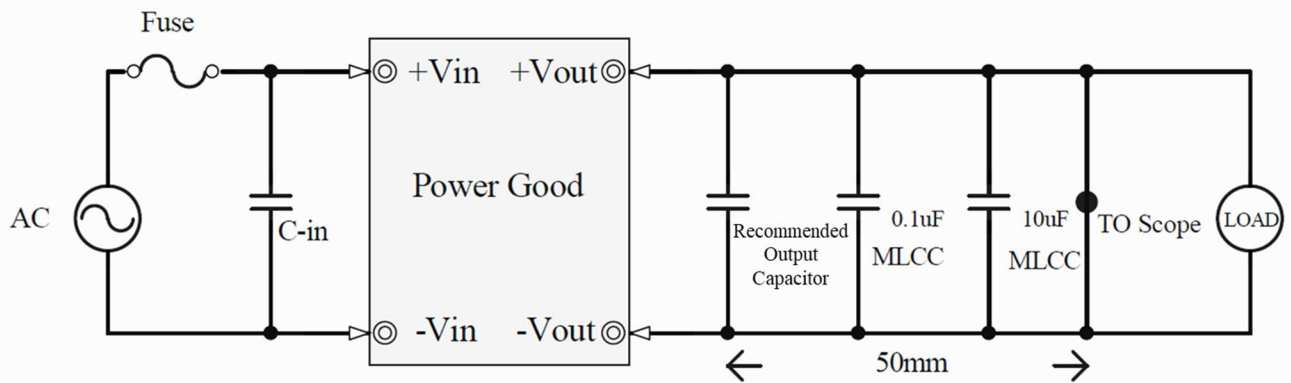


Figure 3. Measuring Output Ripple/Noise (20MHz bandwidth)

## Recommended Circuit Diagram

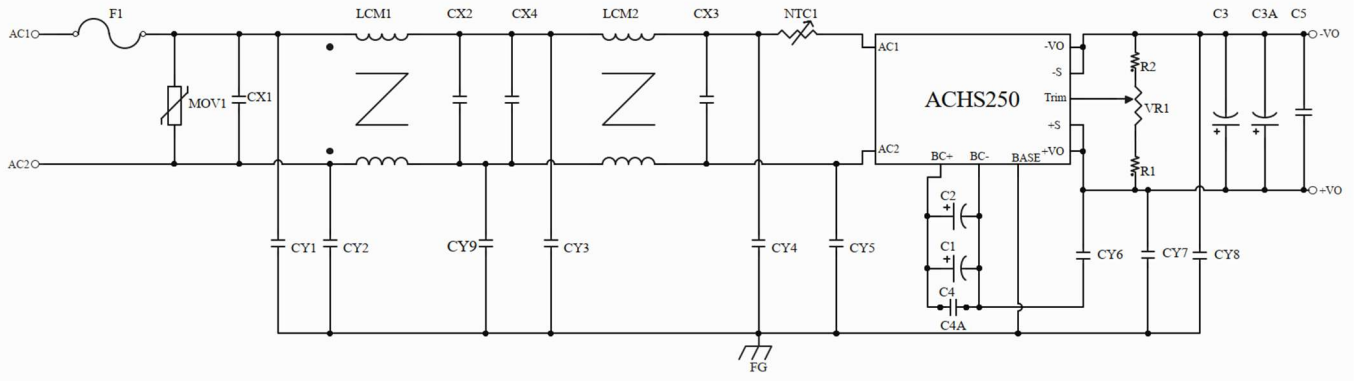


**Bill of Materials**

No.	Sch Symbol	Description	Rating	Manufacturer / Part Number	
1	F1	Fuse	4A/250Vac	Bel 0697W4000-02	
2	MOV1	Varistor	620V	Panasonic ERZ-V10D621	
3	CX1、CX2	X Capacitor	0.47uF/310Vac	KEMET R49AN34700001K	
4	CX3	X Capacitor	0.68uF/250Vac	KEMET R46KN368045M2M	
5	LCM1、LCM2	Common Mode Choke	7mH	Amogreentech A121 T14*8*7C with $\psi$ 0.4mm*25 turns	
6	CY2、CY3 CY7、CY6	Y Capacitor	2200pF/250Vac	Vishay WKP222MCPERUKR	
7	NTC1	Thermistor	5R	TDK B57211P0509M351	
8	C1、C2	PFC boost capacitor	120uF/420Vdc	NIPPON CHEMI-CON EKXL421ELL121MM30S	
9	C3、C3A	Output Capacitor	12V	1000uF/35Vdc	KYOCERA AVX RPF1018102M035K
			24V	470uF/50Vdc	KYOCERA AVX RPF1018471M050K
			28V	470uF/50Vdc	KYOCERA AVX RPF1018471M050K
			36V	330uF/63Vdc	KEMET A759PY337M1JAAE042
			48V	330uF/63Vdc	KEMET A759PY337M1JAAE042
10	C4	Bypass Capacitor	0.1uF/630Vdc		Murata RDER72J104K4K1H03B
	C5		1uF/100Vdc		Murata GRJ31CR72A105

**\*Note:**

1. CY1, CY4, CY5, CY8, CY9 & CX4 are reserved positions for EMI filter design adjustment and not listed in BOM.
2. C4A are reserved positions and not listed in BOM.
3. C1 & C2 capacitor is needed, PSU will not normally work without C1 & C2.
4. BASE can be connected to FG through M3 mounting screw holes.

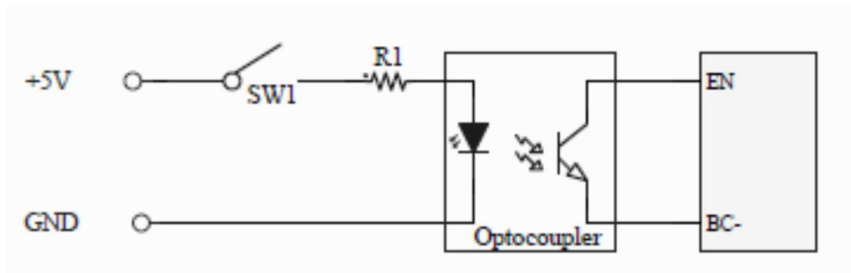**Enable Control**


Note :

SW1 On = Module Off  
SW1 Off = Module On

