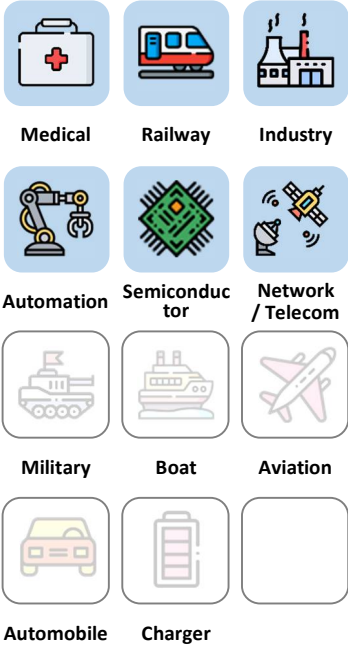




ACO100 Series

100W & 150W / Open Frame AC/DC

Applications



3 Years Warranty



Features

1/4 Brick	90~264VAC Input range	150W Active PFC	Long Hold-up Time	-40~85°C Case Temperature	3000 VAC Insulation	90 % High efficiency	Base plate cooled
Output Trimming (Optional)	OCP	OVP	OTP	SCP			

Model Number Structure

AC O 100 - 120 S - 150

Series Name	Package	Watt	Output Voltage (VDC)	Output Quantity	Actual Watt
AC series	Open Frame	100	120 : 12	S : Single	Actual Watt
			240 : 24		
			280 : 28		
			360 : 36		
			480 : 48		

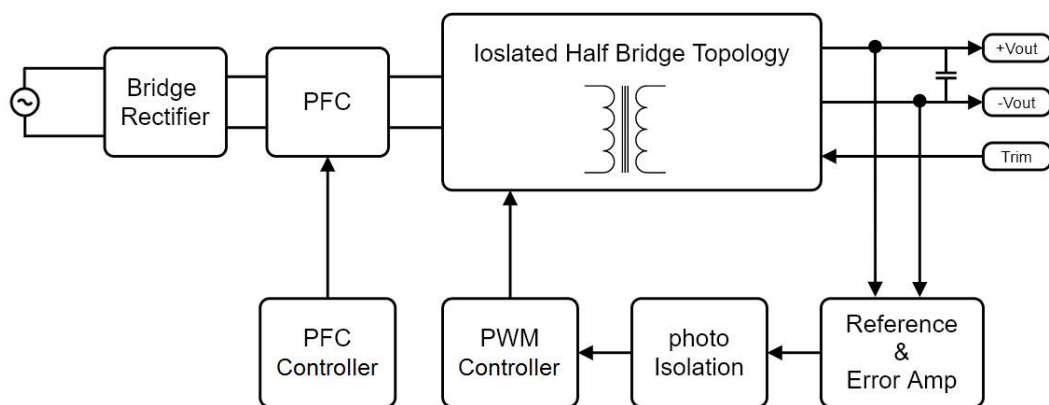
Model Selection Guide

Typical @ Ta=+25 °C under nominal line voltage conditions unless noted

Model	Input			Output			Efficiency
	Voltage (V)		Current (A)	Voltage	Current	Power	
	Range	Nominal	Full load	(V)	(A)	(W)	Typ.(%)
ACO100-120S-100	90-264	230	0.48	12	8.33	100	89
ACO100-240S-100	90-264	230	0.48	24	4.16	100	90
ACO100-280S-100	90-264	230	0.48	28	3.57	100	90
ACO100-360S-100	90-264	230	0.48	36	2.77	100	90
ACO100-480S-100	90-264	230	0.48	48	2.08	100	90
ACO100-120S-150	90-264	230	0.75	12	12.5	150	89
ACO100-240S-150	90-264	230	0.75	24	6.25	150	90
ACO100-280S-150	90-264	230	0.75	28	5.35	150	90
ACO100-360S-150	90-264	230	0.75	36	4.16	150	90
ACO100-480S-150	90-264	230	0.75	48	3.13	150	90

Description

AC series - Open Frame 100 converter is a 100W / 150W isolated, regulated ac/dc converter with active PFC in quarter brick package and long hold-up time setting by external capacitors. It features a high efficiency up to 90%, wide working case temperature range -40~+85°C, no minimum load required, 3kVac reinforced insulation, OVP, OCP, SCP, OTP, etc. These power modules use advanced power processing, control and packaging technologies and are suitable for many applications with harsh environments where wide temperature variation and space limitations, etc.



ACO100 Series Block Diagram

Electrical Specifications

(Typical @ Ta=+25°C under nominal line voltage conditions unless noted.)

Input Specifications

Parameter	Notes and Conditions	Min.	Typ.	Max.	Unit
Operating Input Voltage Ranges		90	230	264	VAC
Operating Input Frequency Ranges		47	50/60	63	Hz
Input Current	at 115VAC 100% load at 230VAC 100% load		1 0.5		A
Inrush Current	cold start at 230Vac, 25°C	Limited by external components (Thermistor)			
Power Factor	at 115VAC 100% load at 230VAC 100% load		1 0.99		
Leakage Current	at 240VAC 60Hz 100% load			0.75	mA

Output Specifications

Parameter	Notes and Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	100% Load			±1.5	%
Line Regulation	High Line to Low Line			±0.5	%
Load Regulation	0% to 100% Load			±1	%
Output Ripple & Noise Voltage	Bandwidth 20MHz and with 10uF MLCC Output Capacitor			2	%V _{pk-pk}
Minimum Load		0			A
Hold Up Time	at full load & 115 VAC	Setting by external capacitors between +BC & -BC			
Over Voltage Protection		110		140	%
Over current Protection	Hiccup mode		140		%
Short-circuit Protection	Hiccup mode	Auto-Recovery			


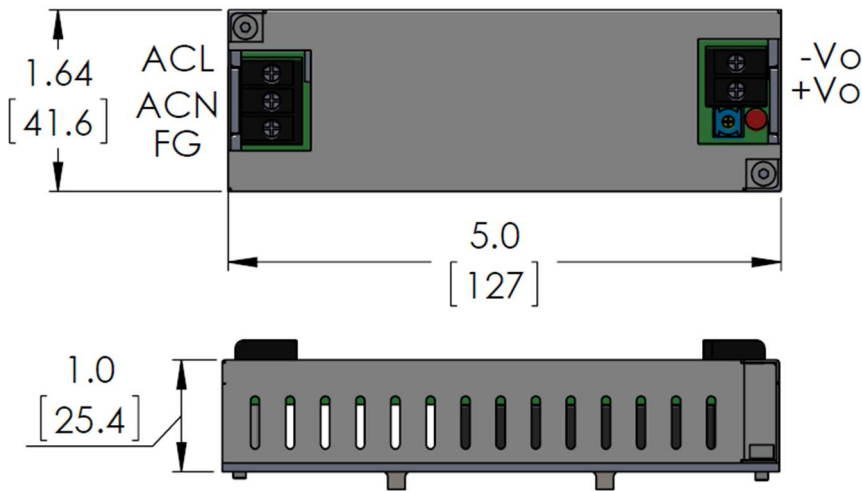
General Specifications & Environmental Specifications

Parameter	Notes and Conditions	Min.	Typ.	Max.	Unit
Switching Frequency	PFC/AC-DC		100/130		kHz
Storage Temperature Range	All models	-55		100	°C
Operating Case Temperature	on aluminum base plate	-40		85	°C
Humidity (non condensing)	All models			95	%
Isolation Voltage	Input to Output		3000		VAC
	Input to Base		1500		VAC
	Output to Base		500		VAC
Calculated MTBF	BellCore-TR-332@ 50°C G.B		1.2		M HR
Weight			260 (9.17)		g (oz.)
Dimensions		5" x 1.64" x 1.0" (127 x 41.6 x 25.4mm)			
Case Material	Metal				

It is recommended to protect the input by fuses or other protection devices.

Modules could meet EN55022 Class A and Class B standard with external components.

The information and specifications contained in this data sheet are believed to be correct at time of publication. All specifications are subject to change without notice. No rights under any patent accompany the sale of any such products or information contained herein.

Mechanical Dimensions & Pin Assignments
Shape

Note:

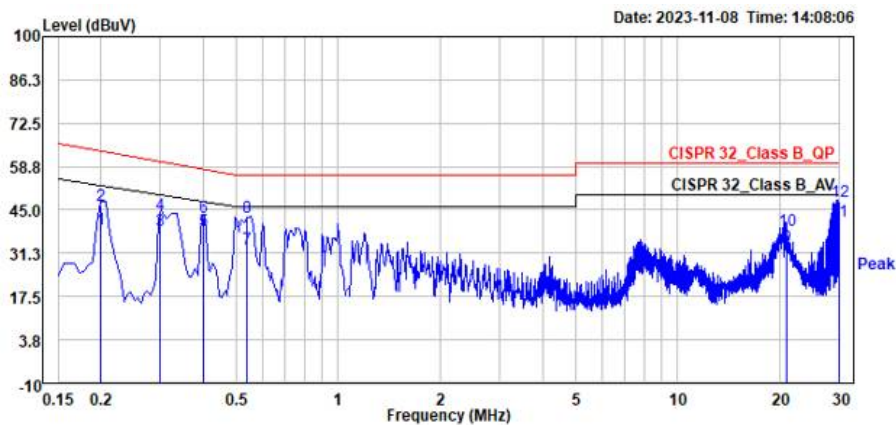
Pin Material: Copper Alloy

Pin Plating: Gold

Dimensions in inches [mm]

Tolerances: .XX±0.25 [.X±0.5mm]

Conducted EMI

 Input terminal value (typ.) ACO100-120S-150 @V_{in} = 230VAC, I_{out} = 12.5A


	Read	Limit	Over			Remark	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase	
MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.201	28.63	10.27	38.90	52.82	-13.92 line1	Average
2	0.201	36.11	10.27	46.38	63.58	-17.20 line1	QP
3	0.300	28.43	10.26	38.69	49.82	-11.13 line1	Average
4	0.300	33.44	10.26	43.70	60.24	-16.54 line1	QP
5	0.400	28.20	10.27	38.47	47.67	-9.20 line1	Average
6	0.400	32.33	10.27	42.60	57.86	-15.26 line1	QP
7	0.536	22.31	10.28	32.59	46.00	-13.41 line1	Average
8	0.536	32.23	10.28	42.51	56.00	-13.49 line1	QP
9	20.948	21.52	12.03	33.55	50.00	-16.45 line1	Average
10	20.948	26.29	12.03	38.32	60.00	-21.68 line1	QP
11 PP	29.879	28.42	12.82	41.24	50.00	-8.76 line1	Average
12 QP	29.879	35.03	12.82	47.85	60.00	-12.15 line1	QP

The fundamental switching frequency of the module is 100 kHz.

